

Contents

投射灯系列
Flood light series
P001-P188

					
SL1309	SL1307	SL1306	SL1304	SL1305	SL1301
					
SL1302	SL1303	SL1323	SL1322	SL1321	SL1351
					
SL1352	SL1130F	SL1131F	SL1132F	SL1135O	SL1136O
					
SL1137O	SL1139O	SL1128O	SL1129O	SL1151F	SL1150F
					
SL1140F	SL1145F	SL1146F	SL1147F	SL1148F	SL1102U
					
SL1102F	SL1103U	SL1103F	SL1104U	SL1104F	SL1105U
					
SL1105F	SL1125F	SL1126F	SL1127F	SL1269U	SL1272U
					
SL1271U	SL1278U	SL1281U	SL1232F	SL1235F	SL1236F
					
SL1239F	SL1240U	SL1245U	SL1246U	SL1247U	SL1258U

照树灯系列
LED Tree Light series
P189–P202



地埋灯系列
Inground light series
P203–P270



轮廓灯系列
Outline light series
P271–P299



水下灯系列
Underwater light series
P300–P304



水下灯系列
Underwater light series
P300–P304



壁灯系列
Wall light series
P305–P316



路灯系列
Road light series
P317–P326



高天棚灯系列
LED Highbay light series
P327–P338



控制系统
Control system
P339–P348




Flood Light Series

SL1307

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	



reddot winner 2021

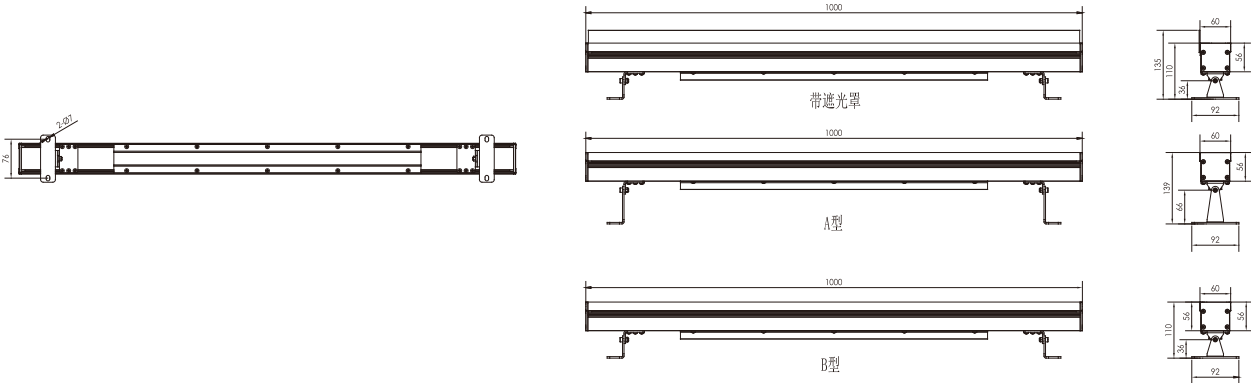



产品简介 Product Introduction

- 一、高功率LED线型灯，外型时尚美观；加大的散热结构设计，充分保证LED的稳定性和长寿命。
- 二、灯体采用6063铝合金模具成型，表面阳极氧化处理；灯罩采用高强度钢化玻璃。抗冲击耐磨擦，具有优良的雨水清洁能力。
- 三、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
- 四、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX 在线自动寻址功能。

- 1、High power LED liner light, fashion and beautiful appearance, with the design of increasing heat dissipation to fully ensure the stability and long lifespan of LED fixture.
- 2、The light body adopts #6063 aluminum alloy molding, surface with anodizing treatment, lampshade adopts high strength toughened glass, resist the impact and friction, has excellent rainwater clean ability.
- 3、Adopt American CREE original LED light source, high flus output, excellent consistency of light color,;Constant current driver with PWM gray control installed inside, RGB gray level can reach to 65,536 degree equally, make the dynamic light-dimmer more soft,and the color richer.
- 4、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

技术参数 Specification

产品型号/ Product Code	SL1307M-20	SL1307E-20	SL1307E-10(0.5m)	SL1307E-6(0.3m)
Led品牌/ Led Brand	CREE/OSRAM	CREE/OSRAM	CREE/LUMILEDS	CREE/LUMILEDS
Led数量/ Led Quantity	20pcs	20pcs	10pcs	6pcs
额定功率/ Rated Power	95W	95W	48W	30W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single/RGBW	Single	Single	Single
发光角度/ Beam Angle	2.5°	6° 12° 20° 30° 60° 10X70° 5X20°		
控制方式/ Control Mode	CC/DMX512/RDM	CC/DALI/0-10V	CC/DALI/0-10V	CC/DALI/0-10V
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	6pcs	6pcs	12pcs	20pcs
产品型号/ Product Code	SL1307N-20	SL1307P-20	SL1307F-20	SL1307F-10(0.5m)
Led品牌/ Led Brand	RGBWCLA 7in1	RGBWCL 6in1	OSRAM RGBW 4in1	OSRAM RGBW 4in1
Led数量/ Led Quantity	20pcs	20pcs	20pcs	10pcs
额定功率/ Rated Power	100W	100W	100W	50W
输入电压/ Input Voltage	DC24V	DC24V	DC24V	DC24V
频率/ Frequency Range	/	/	/	/
颜色 / Color	RGBWCLA	RGBWCL	RGBW	RGBW
发光角度/ Beam Angle	15° 20° 30° 15X60°	15° 20° 30° 15X60°	9° 15° 20° 30° 45° 15X60°	
控制方式/ Control Mode	DMX512	DMX512	DMX512/RDM	DMX512/RDM
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	40pcs	40pcs	12pcs	25pcs
产品型号/ Product Code	SL1307F-6(0.3m)			
Led品牌/ Led Brand	OSRAM RGBW 4in1			
Led数量/ Led Quantity	6pcs			
额定功率/ Rated Power	30W			
输入电压/ Input Voltage	DC24V			
频率/ Frequency Range	/			
颜色 / Color	RGBW			
发光角度/ Beam Angle	9° 15° 20° 30° 45° 15X60°			
控制方式/ Control Mode	DMX512/RDM			
使用寿命/ Life	50000H			
防护等级/ Protection Grade	IP66			
环境温度/ Ambient Temperature	-25℃~50℃			
环境湿度/ Ambient Humidity	10%~90%			
串联数量/ In series(max)	40pcs			

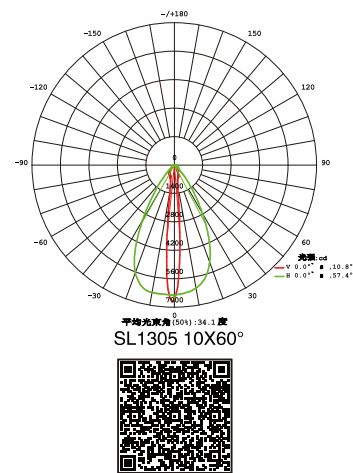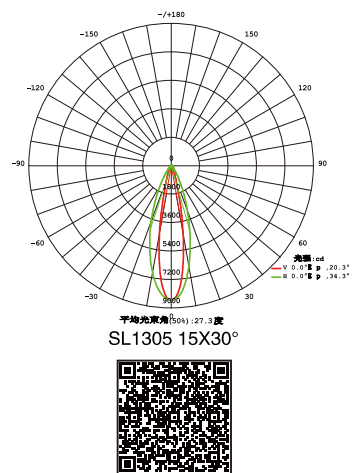




Flood Light Series

SL1301

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	



reddot winner 2021

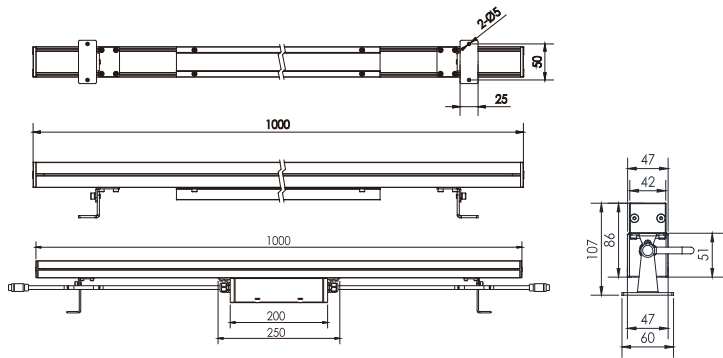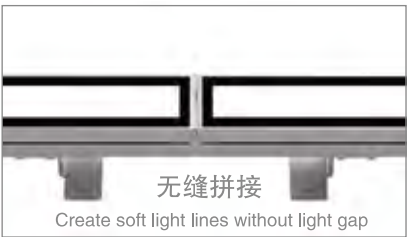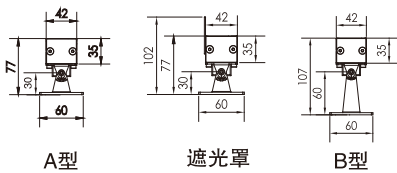


产品简介 Product Introduction

- 一、高功率LED线型灯，外型时尚美观；加大的散热结构设计，充分保证LED的稳定性和长寿命。
 - 二、灯体采用6063铝合金模具成型，表面阳极氧化处理；灯罩采用高强度钢化玻璃。抗冲击耐磨擦，具有优良的雨水清洁能力。
 - 三、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
 - 四、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX 在线自动寻址功能。
- 1、High power LED liner light, fashion and beautiful appearance, with the design of increasing heat dissipation to fully ensure the stability and long lifespan of LED fixture.
 - 2、The light body adopts #6063 aluminum alloy molding, surface with anodizing treatment, lampshade adopts high strength toughened glass, resist the impact and friction, has excellent rainwater clean ability.
 - 3、Adopt American CREE original LED light source, high flus output, excellent consistency of light color,;Constant current driver with PWM gray control installed inside, RGB gray level can reach to 65,536 degree equally, make the dynamic light-dimmer more soft,and the color richer.
 - 4、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.

Flood Light Series

SL1130F

圓孔格柵 Round-meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窩格柵 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
蜂窩玻璃 Honeycomb glass		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	



产品简介 Product Introduction

- 一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
- 二、可选择具有多向旋转功能的圆形支座或U支架型，满足多种场合的户外工程应用。
- 三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃. 抗冲击耐磨擦。
- 四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
- 五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。
- 1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
- 2、With multiway rotate function of round support or "U" support available to meet the various occasions demands for outdoor projects.
- 3、Light body adopts high pressure die-casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
- 4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
- 5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.





技术参数 Specification

产品型号/ Product Code	SL1130FM-36	SL1130FE-36	SL1130FK-36	SL1130FL-36
Led品牌/ Led Brand	CREE/OSRAM	CREE/OSRAM	CREE XHP50	OSRAM
Led数量/ Led Quantity	36pcs	36pcs	36pcs	36pcs
额定功率/ Rated Power	320W	360W	450W	360W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single/RGBW	Single	Single	RGBW
发光角度/ Beam Angle	2°	4.5° 8° 12°	20° 30° 45° 60° 10X70°	5X20°
控制方式/ Control Mode	CC/DMX512/RDM	CC/DALI/0-10V	CC/DMX512/RDM	DMX512/RDM
使用寿命/ Life	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	3pcs	3pcs	2pcs	3pcs
产品型号/ Product Code	SL1130FN-36	SL1130FF-36	SL1130FC-144	SL1130FM-19
Led品牌/ Led Brand	RGBWCLA 7in1	CREE RGBW 4in1	CREE	CREE/OSRAM
Led数量/ Led Quantity	36pcs	36pcs	144pcs	19pcs
额定功率/ Rated Power	360W	450W(CREE)/360W(OSRAM)		170W
输入电压/ Input Voltage	AC100-305V	AC100-305V	AC100-305V	AC100-305V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	RGBWCLA	RGBW	Single/RGBW	Single/RGBW
发光角度/ Beam Angle	10° 15° 20° 30° 15X60°	8° 15° 20° 30° 15X60°	6° 8° 12.5° 20° 30° 15X60°	1.5°
控制方式/ Control Mode	DMX512/RDM	DMX512/RDM	CC/DMX512/RDM	CC/DMX512/RDM
使用寿命/ Life	80000H	80000H	80000H	80000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	3pcs	3pcs	3pcs	5pcs

Flood Light Series

SL1128O

圆孔格栅 Round-meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窝格栅 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
蜂窝玻璃 Honeycomb glass		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

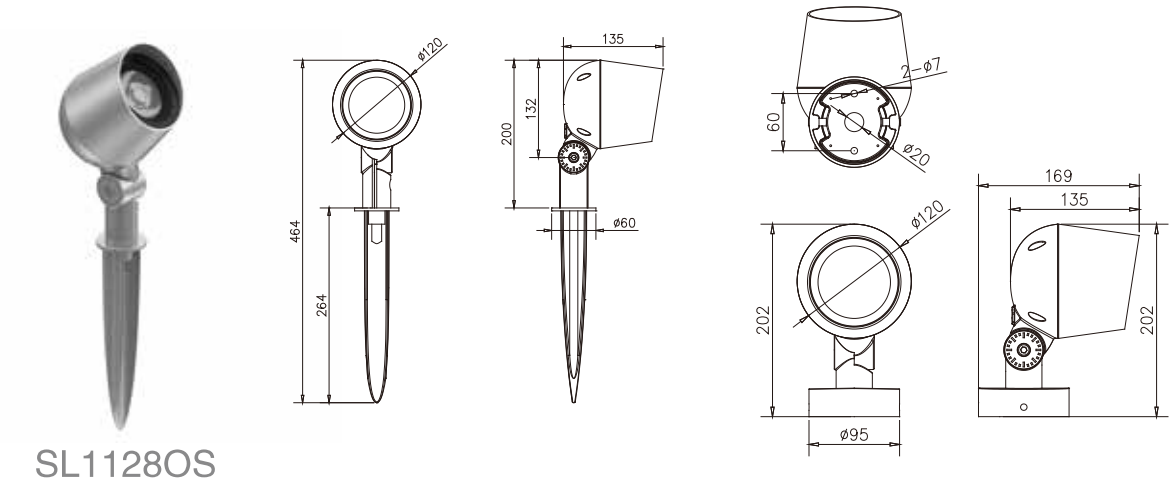



技术参数 Specification

产品型号/ Product Code	SL1128OM-2	SL1128OE-2	SL1128OF-2	SL1128OC-6
Led品牌/ Led Brand	CREE	CREE XP-L/OSRAM	CREE RGBW 4 in 1	CREE XP-G3
Led数量/ Led Quantity	2pcs	2pcs	2pcs	6pcs
额定功率/ Rated Power	20W	20W	30W/20W(OSRAM)	25W
输入电压/ Input Voltage	AC100-264V	AC100-264V	DC24V/AC100-264V	AC100-264V
频率/ Frequency Range	50/60Hz	50/60Hz	/	50/60Hz
颜色 / Color	Single	Single	RGBW	Single
发光角度/ Beam Angle	2.5°	6° 12° 20° 30° 45° 60° 10X70° 5X20°	9° 15° 20° 30° 45° 15X60°	8° 12.5° 30° 10X60°
控制方式/ Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	DMX512	CC/DALI/0-10V
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	88pcs	60pcs	7pcs	60pcs
产品型号/ Product Code	SL1128O-C20	SL1128O-CS20		
Led品牌/ Led Brand	CREE COB	SunLike COB CRI>97		
Led数量/ Led Quantity	1pcs	1pcs		
额定功率/ Rated Power	20W	20W		
输入电压/ Input Voltage	AC100-264V	AC100-264V		
频率/ Frequency Range	50/60Hz	50/60Hz		
颜色 / Color	Single	Single		
发光角度/ Beam Angle	15° 24° 36° 60°	15° 24° 36° 60°		
控制方式/ Control Mode	CC/DALI/0-10V	CC/DALI/0-10V		
使用寿命/ Life	50000H	50000H		
防护等级/ Protection Grade	IP66	IP66		
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃		
环境湿度/ Ambient Humidity	10%~90%	10%~90%		
串联数量/ In series(max)	60pcs	60pcs		


Flood Light Series

SL1129O

圆孔格栅 Round-meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窝格栅 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
蜂窝玻璃 Honeycomb glass		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

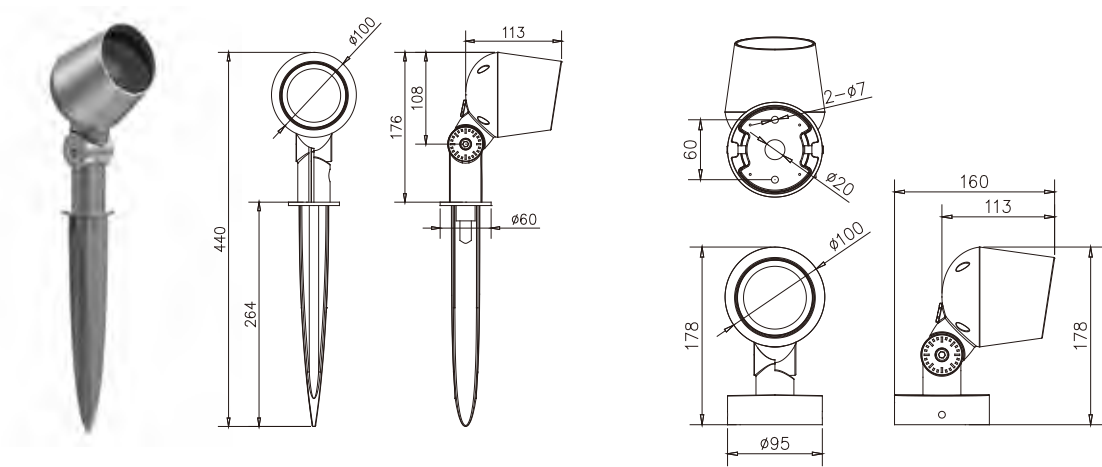

SL1129OS

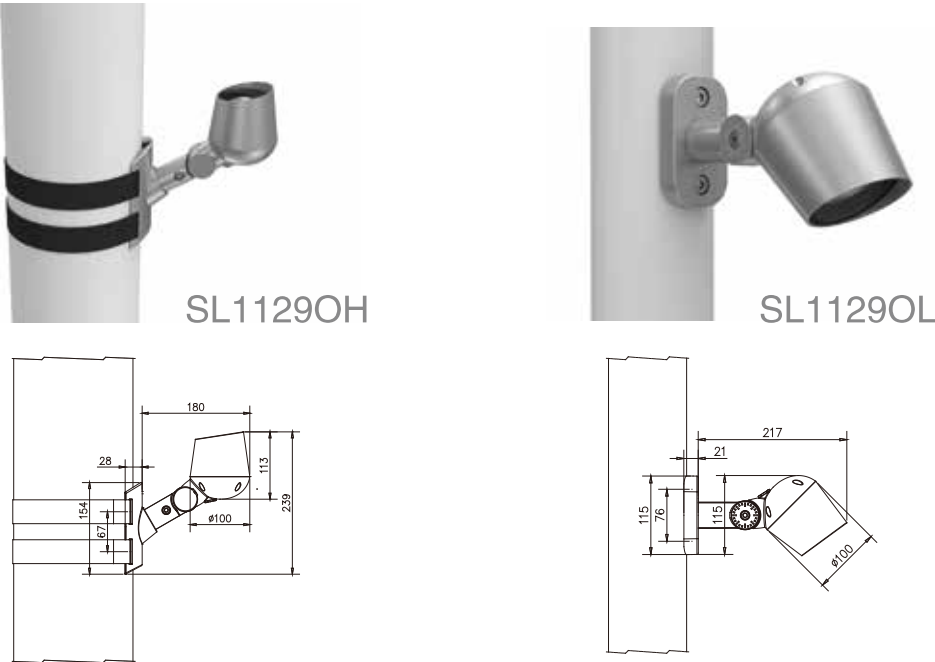

SL1129OH

SL1129OL


技术参数 Specification

产品型号/ Product Code	SL1129OM-1	SL1129OE-1	SL1129OF-1	SL1129OC-3
Led品牌/ Led Brand	CREE	CREE XP-L/OSRAM	CREE RGBW 4 in 1	CREE XP-G3
Led数量/ Led Quantity	1pcs	1pcs	1pcs	3pcs
额定功率/ Rated Power	10W	10W	15W/10W(OSRAM)	15W
输入电压/ Input Voltage	AC100-264V	AC100-264V	DC12V/DC24V	AC100-264V
频率/ Frequency Range	50/60Hz	50/60Hz	/	50/60Hz
颜色 / Color	Single	Single	RGBW	Single
发光角度/ Beam Angle	2.5°	6° 12° 20° 30° 45° 60° 10X70° 5X20°	9° 15° 20° 30° 45° 15X60°	8° 12.5° 30° 10X60°
控制方式/ Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	DMX512	CC/DALI/0-10V
使用寿命/ Life	50000H	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	200pcs	120pcs	120pcs	7/14pcs
产品型号/ Product Code	SL1129O-C12	SL1129O-CS12		
Led品牌/ Led Brand	CREE COB	SunLike COB CRI>97		
Led数量/ Led Quantity	1pcs	1pcs		
额定功率/ Rated Power	12W	12W		
输入电压/ Input Voltage	AC100-264V	AC100-264V		
频率/ Frequency Range	50/60Hz	50/60Hz		
颜色 / Color	Single	Single		
发光角度/ Beam Angle	15° 24° 36° 60°	15° 24° 36° 60°		
控制方式/ Control Mode	CC/DALI/0-10V	CC/DALI/0-10V		
使用寿命/ Life	50000H	50000H		
防护等级/ Protection Grade	IP66	IP66		
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃		
环境湿度/ Ambient Humidity	10%~90%	10%~90%		
串联数量/ In series(max)	120pcs	120pcs		


Flood Light Series

SL1146F

圓孔格柵 Round-meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窩格柵 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
蜂窩玻璃 Honeycomb glass		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

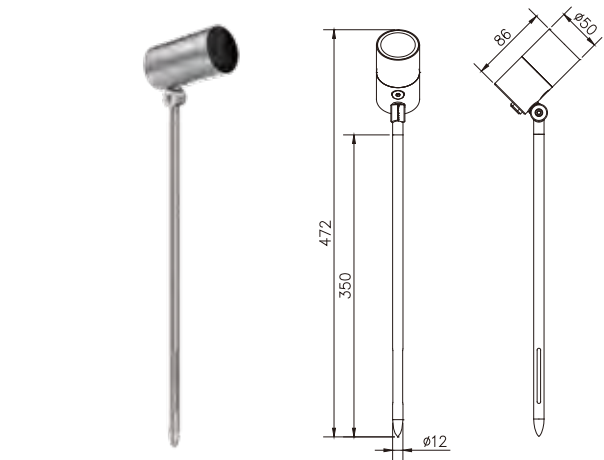




SL1146S

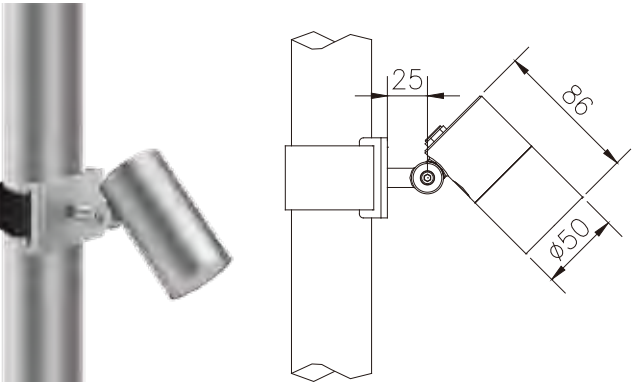

SL1146H
适配树杆尺寸(60-200)M



SL1146C

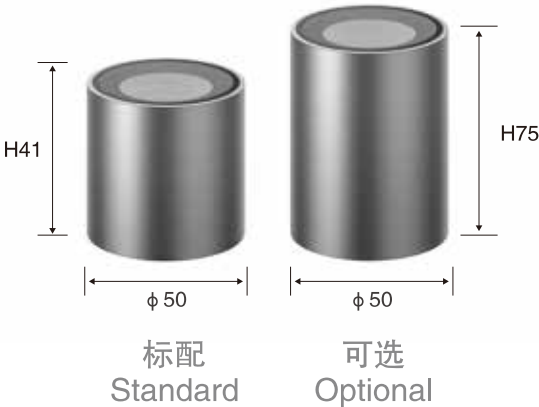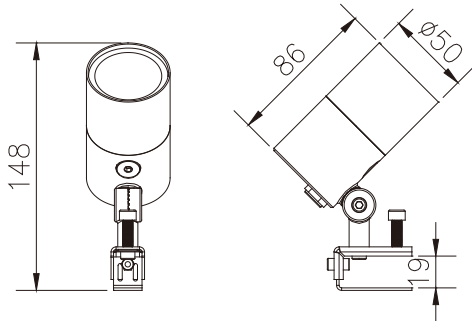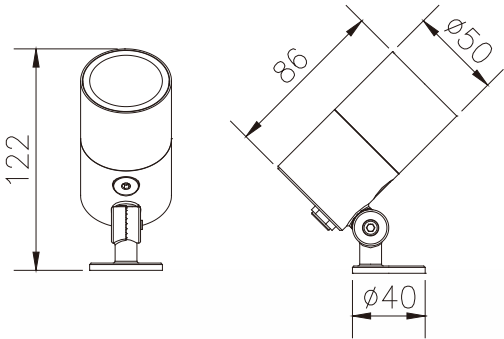

标配
Standard

可选
Optional

产品简介 Product Introduction

- 一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
- 二、可选择具有多向旋转功能的圆形支座或U支架型，满足多种场合的户外工程应用。
- 三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃. 抗冲击耐磨擦。
- 四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
- 五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。
- 1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
- 2、With multiway rotate function of round support or "U" support available to meet the various occasions demands for outdoor projects.
- 3、Light body adopts high pressure die-casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
- 4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
- 5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.


技术参数 Specification

产品型号/ Product Code	SL1146FM-1	SL1146FE-1	SL1146FF-1
Led品牌/ Led Brand	CREE	CREE XP-L	CREE RGBW 4 in 1
Led数量/ Led Quantity	1pcs	1pcs	1pcs
额定功率/ Rated Power	10W	10W	10W
输入电压/ Input Voltage	AC100-264V/DC12V/DC24V	AC100-264V/DC12V/DC24V	DC12V/DC24V
频率/ Frequency Range	50/60Hz	50/60Hz	/
颜色 / Color	Single	Single	RGBW
发光角度/ Beam Angle	2.5°	6° 12° 20° 30° 45° 60° 10X70° 5X20°	9° 15° 20° 30° 45° 15X60°
控制方式/ Control Mode	CC	CC	DMX512
使用寿命/ Life	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	120pcs/12pcs	64pcs	64pcs

Flood Light Series

SL1147F

圓孔格柵 Round-meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窩格柵 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
蜂窩玻璃 Honeycomb glass		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

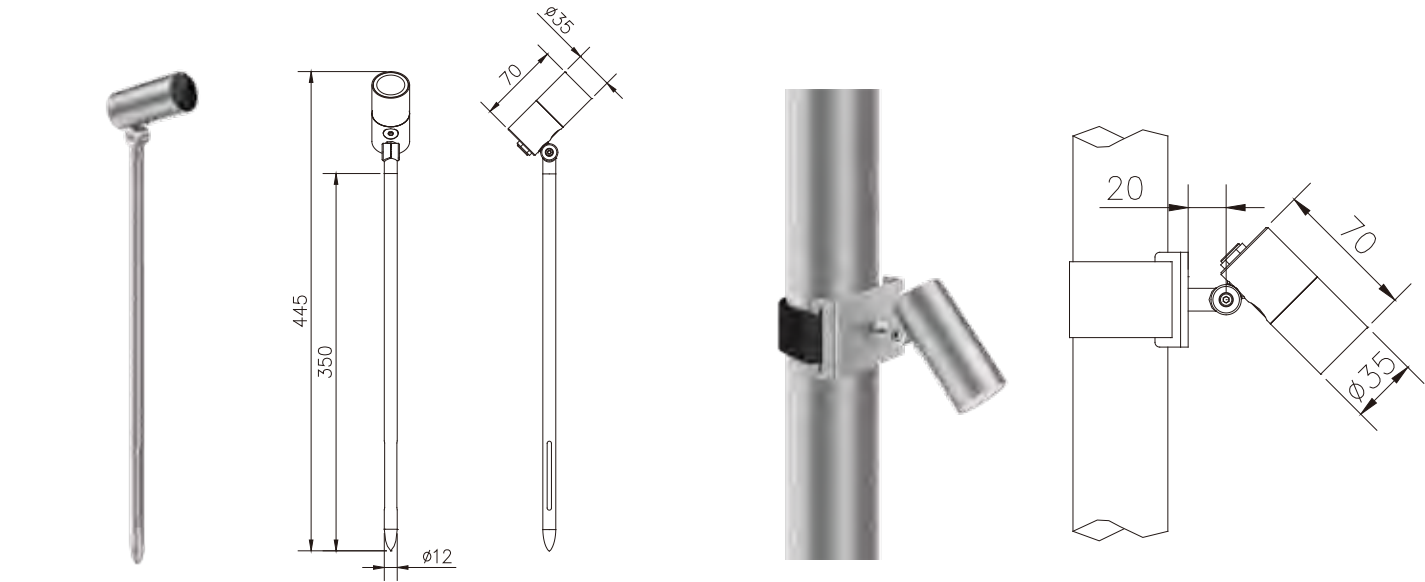

SL1147S

SL1147H
适配树杆尺寸(60–200)M

产品简介 Product Introduction

- 一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
- 二、可选择具有多向旋转功能的圆形支座或U支架型，满足多种场合的户外工程应用。
- 三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃. 抗冲击耐磨擦。
- 四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
- 五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。
- 1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
- 2、With multiway rotate function of round support or "U" support available to meet the various occasions demands for outdoor projects.
- 3、Light body adopts high pressure die-casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
- 4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
- 5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.


技术参数 Specification


产品型号/ Product Code	SL1147FM-1	SL1147FE-1	SL1147FF-1
Led品牌/ Led Brand	CREE	CREE	CREE RGBW 4 in 1
Led数量/ Led Quantity	1pcs	1pcs	1pcs
额定功率/ Rated Power	6W	6W	6W
输入电压/ Input Voltage	AC100–264V防水防雷阻气线 / DC12V/DC24V		DC12V/DC24V
频率/ Frequency Range	50/60Hz	50/60Hz	/
颜色 / Color	Single	Single	RGBW
发光角度/ Beam Angle	6°	12.5° 20° 30° 60° 15X30° 10X60°	20° 45° 60° 15X60° 15X25°
控制方式/ Control Mode	CC	CC	DMX512
使用寿命/ Life	50000H	50000H	50000H
防护等级/ Protection Grade	IP66	IP66	IP66
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10%~90%	10%~90%	10%~90%
串联数量/ In series(max)	120pcs/12pcs	120pcs/12pcs	64pcs




Flood Light Series

SL1148F

圓孔格柵 Round-meshed grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
蜂窩格柵 Honeycomb grill		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
蜂窩玻璃 Honeycomb glass		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
防眩遮光罩 Anti-glare shield		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

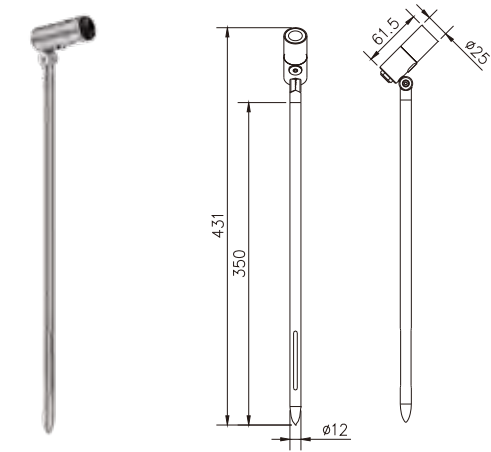




SL1148S

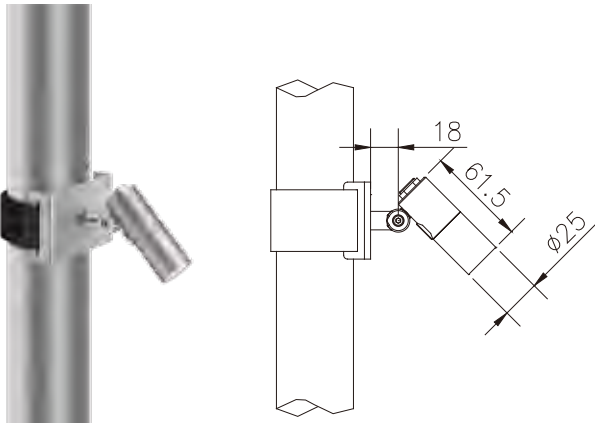

SL1148H
适配树杆尺寸(60-200)M



SL1148C

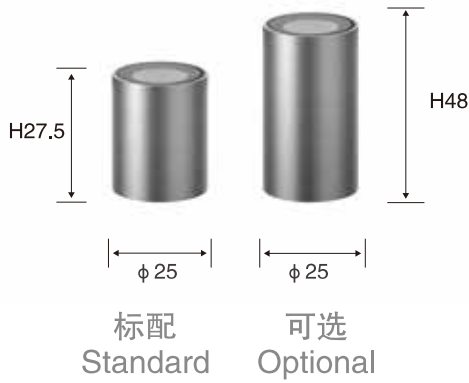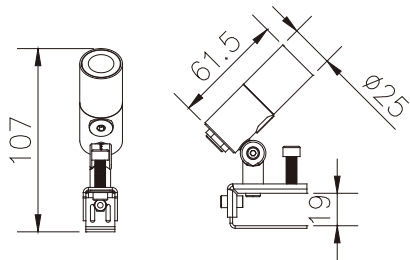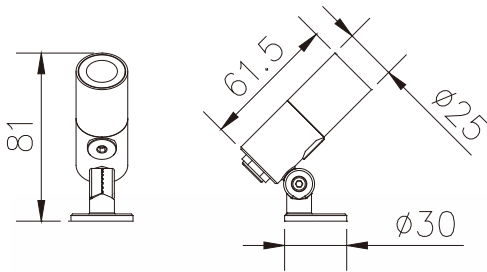

产品简介 Product Introduction

- 一、拥有自主知识产权的原创设计，外型时尚美观；采用隔离双腔体结构，独立散热，充分保证LED的稳定性和长寿命。
- 二、可选择具有多向旋转功能的圆形支座或U支架型，满足多种场合的户外工程应用。
- 三、灯体采用高强度压铸铝成型，表面氟碳喷涂处理；灯罩采用高强度钢化玻璃. 抗冲击耐磨擦。
- 四、采用美国CREE 原装LED光源，高光通量输出，光色一致性好；恒流驱动电源，内建PWM辉度控制，RGB辉度级别均达65536级，使动态调光更柔和、色彩绚丽。
- 五、功能强大的DMX512接口采用高可靠总线式连接，均带有DMX在线自动寻址功能。
- 1、Patent owned design, fashion and beautiful appearance, adopt isolated two bodies design could have the separate heat dissipation fully ensure the stability and long lifespan of LED light.
- 2、With multiway rotate function of round support or "U" support available to meet the various occasions demands for outdoor projects.
- 3、Light body adopts high pressure die-casting aluminum, surface with fluorine carbon spraying. Lampshade adopts high strength toughened glass, resist the impact and friction.
- 4、Adopt American CREE original LED light source, high flus output, excellent consistency of light color; Constant current driver with PWM gray control installed inside, RGB gray level reaches to 65,536 degree equally, make the light result much beautiful.
- 5、Powerful DMX512 interface adopts high reliable bus connect, all has the function of automatic addressing.


技术参数 Specification

产品型号/ Product Code	SL1148FE-1	
Led品牌/ Led Brand	CREE XP-E	
Led数量/ Led Quantity	1pcs	
额定功率/ Rated Power	3W	
输入电压/ Input Voltage	DC12V/DC24V	
频率/ Frequency Range	50/60Hz	
颜色 / Color	Single	
发光角度/ Beam Angle	20° 30° 45° 60° 25X45°	
控制方式/ Control Mode	CC	
使用寿命/ Life	50000H	
防护等级/ Protection Grade	IP66	
环境温度/ Ambient Temperature	-25℃~50℃	
环境湿度/ Ambient Humidity	10%~90%	
串联数量/ In series(max)	220pcs/22pcs	

Inground Light Series

SL2161C

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防滑玻璃 Anti-slip glass		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

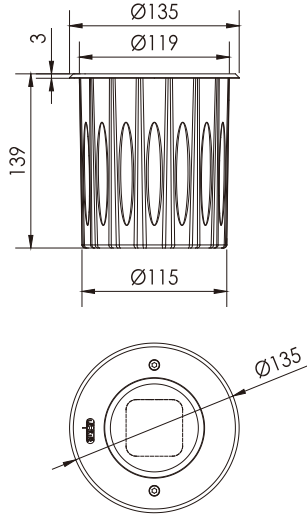


技术参数 Specification

产品型号/ Product Code	SL2161CM-1	SL2161CE-1	SL2161CF-1	SL2161CC-4	SL2161CA-9
LED品牌/ LED Brand	CREE/OSRAM	CREE XP-L	CREE/OSRAM XM-L 4in1	CREE XP-G3	OSRAM
LED数量/ LED Quantity	1pcs	1pcs	1pcs	4pcs	1pcs
额定功率/ Rated Power	10W	10W	10W	10W	10W
输入电压/ Input Voltage	AC100-305V	AC100-305V	DC12V/DC24V	AC100V-305V	DC24V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single	Single	RGBW	Single	RGBW
发光角度/ Beam Angle	2°	4.5° 8° 12° 20° 30° 45° 60° 10X70° 5X20°	8° 15° 20° 30° 15X60°	8° 12.5° 20° 30° 60° 15X30° 10X60°	12° 15° 24° 20X30°
控制方式/ Control Mode	CC/DALI/0-10V	CC/DALI/0-10V	DMX512/RDM	CC/DALI/0-10V	DMX512
使用寿命/ Life	80000H	80000H	50000H	80000H	80000H
防护等级/ Protection Grade	IP67	IP67	IP67	IP67	IP67
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	120pcs	120pcs	7pcs	120pcs	7pcs

Inground Light Series

SL2160C

蜂窝格栅 Honeycomb grill		zoomneo 2.5° 三次光学 zoomneo 2.5° The third optics		zoomneo 30° 三次光学 zoomneo 30° The third optics	
防滑玻璃 Anti-slip glass		zoomneo 3.5° 三次光学 zoomneo 3.5° The third optics		zoomneo 40° 三次光学 zoomneo 40° The third optics	
		zoomneo 5° 三次光学 zoomneo 5° The third optics		zoomneo 1x10° 三次光学 zoomneo 1x10° The third optics	
		zoomneo 10° 三次光学 zoomneo 10° The third optics		zoomneo 1x40° 三次光学 zoomneo 1x40° The third optics	
		zoomneo 15° 三次光学 zoomneo 15° The third optics		zoomneo 1x60° 三次光学 zoomneo 1x60° The third optics	
		zoomneo 20° 三次光学 zoomneo 20° The third optics		zoomneo 10x60° 三次光学 zoomneo 10x60° The third optics	

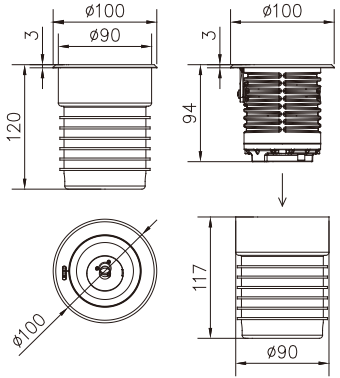

技术参数 Specification

产品型号/ Product Code	SL2160CM-1	SL2160CE-1	SL2160CF-1
LED品牌/ LED Brand	CREE	CREE XP-L	CREE/OSRAM XM-L 4in1
LED数量/ LED Quantity	1pcs	1pcs	1pcs
额定功率/ Rated Power	6W	6W	10W
输入电压/ Input Voltage	AC100-264V / DC12V	AC100-264V / DC12V	DC12V/DC24V
频率/ Frequency Range	50/60Hz	50/60Hz	50/60Hz
颜色 / Color	Single	Single	RGBW
发光角度/ Beam Angle	2.5°	8° 12° 20° 30° 45° 60° 10X70° 5X20°	9° 15° 20° 30° 45° 15X60°
控制方式/ Control Mode	CC	CC	DMX512
使用寿命/ Life	50000H	80000H	50000H
防护等级/ Protection Grade	IP67	IP67	IP67
环境温度/ Ambient Temperature	-25℃~50℃	-25℃~50℃	-25℃~50℃
环境湿度/ Ambient Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%
串联数量/ In series(max)	60pcs	60pcs	60pcs